


BlueSolar Charge Controllers MPPT 150/70 & 150/85

www.victronenergy.com

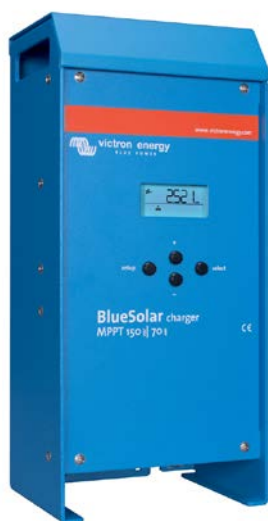

**Solar Charge Controllers
MPPT 150/70 and 150/85**

PV voltage up to 150 V

The BlueSolar MPPT 150/70 and 150/85 charge controllers will charge a lower nominal-voltage battery from a higher nominal voltage PV array.

The controller will automatically adjust to a 12, 24, 36, or 48V nominal battery voltage.

Ultra-fast Maximum Power Point Tracking (MPPT)

Especially in case of a clouded sky, when light intensity is changing continuously, an ultra-fast MPPT controller will improve energy harvest by up to 30% compared to PWM charge controllers and by up to 10% compared to slower MPPT controllers.

Advanced Maximum Power Point Detection in case of partial shading conditions

If partial shading occurs, two or more maximum power points may be present on the power-voltage curve. Conventional MPPT's tend to lock to a local MPP, which may not be the optimum MPP.

The innovative BlueSolar algorithm will always maximize energy harvest by locking to the optimum MPP.

Outstanding conversion efficiency

Maximum efficiency exceeds 98%. Full output current up to 40°C (104°F).

Flexible charge algorithm

Several preconfigured algorithms. One user programmable algorithm.

Manual or automatic equalisation.

Battery temperature sensor. Battery voltage sense option.

Programmable auxiliary relay

For alarm or generator start purposes

Extensive electronic protection

Over-temperature protection and power derating when temperature is high.

PV short circuit and PV reverse polarity protection.

Reverse current protection.

CAN bus

To parallel up to 25 units, to connect to a ColorControl panel or to connect to a CAN bus network

BlueSolar Charge Controller	MPPT 150/70	MPPT 150/85
Nominal battery voltage	12 / 24 / 36 / 48V Auto Select	
Rated charge current	70A @ 40°C (104°F)	85A @ 40°C (104°F)
Maximum solar array input power 1)	12V: 1000W / 24V: 2000W / 36V: 3000W / 48V: 4000W	12V: 1200W / 24V: 2400W / 36V: 3600W / 48V: 4850W
Maximum PV open circuit voltage	150V absolute maximum coldest conditions 145V start-up and operating maximum	
Minimum PV voltage	Battery voltage plus 7 Volt to start	Battery voltage plus 2 Volt operating
Standby power consumption	12V: 0,55W / 24V: 0,75W / 36V: 0,90W / 48V: 1,00W	
Efficiency at full load	12V: 95% / 24V: 96,5% / 36V: 97% / 48V: 97,5%	
Absorption charge	14.4 / 28.8 / 43.2 / 57.6V	
Float charge	13.7 / 27.4 / 41.1 / 54.8V	
Equalization charge	15.0 / 30.0 / 45 / 60V	
Remote battery temperature sensor	Yes	
Default temperature compensation setting	-2,7 mV/°C per 2V battery cell	
Remote on/off	Yes	
Programmable relay	DPST AC rating: 240VAC / 4A DC rating: 4A up to 35VDC, 1A up to 60VDC	
Communication port	VE.Can: two paralleled RJ45 connectors, NMEA2000 protocol	
Parallel operation	Yes, through VE.Can. Max 25 units in parallel	
Operating temperature	-40°C to 60°C with output current derating above 40°C	
Cooling	Low noise fan assisted	
Humidity (non condensing)	Max. 95%	
Terminal size	35mm ² / AWG2	
Material & color	Aluminium, blue RAL 5012	
Protection class	IP20	
Weight	4,2kg	
Dimensions (h x w x d)	350 x 160 x 135mm	
Mounting	Vertical wall mount Indoor only	
Safety	EN/IEC 62109-1	
EMC	EN 61000-6-1, EN 61000-6-3	

1) If more solar power is connected, the controller will limit input power to the stated maximum